




Digital ABS AOS caliper for tolerance comparison measurements

Article number: 573-282-30



Pictures

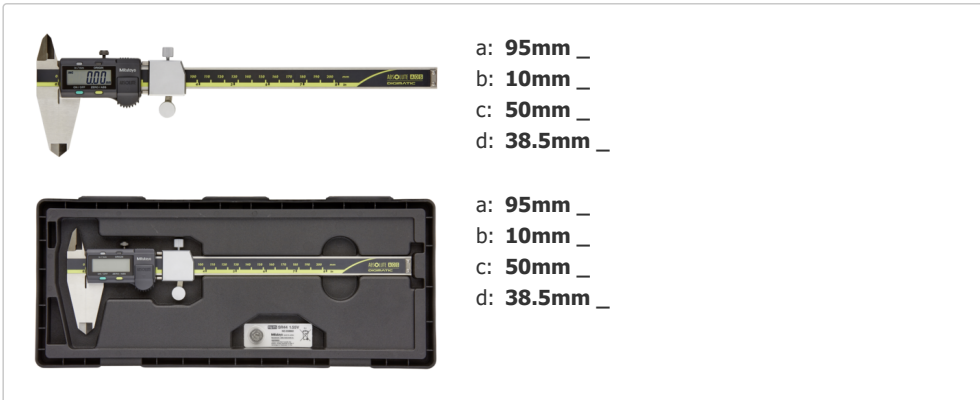

Description

The ABSOLUTE Digimatic caliper with spring-loaded mechanics for GO/NG testing offers you the following advantages:

- Digit height: 9mm (fatigue-free measurement thanks to high-contrast LCD)
- The ABS (ABSOLUTE) scale requires no origin setting after power up and has no traversing speed limit.
- Exceptionally long battery life

specifications

Limit of measurement error E MPE:	±0.001"
Limit value of the measurement deviation S MPE:	±0.002"
Digit increment:	0.0005"/0.01mm
Max. reaction speed:	Unlimited
range of motion:	2mm _
ORIGIN (ABS zero point):	Yes
ON/OFF:	Yes
ABS / INC (INC ZERO) :	Yes
Low voltage alarm:	Yes
Data output:	Yes
Battery life:	Approx. 18,000 hours
Weight:	233g _

Accessories

Special accessories:



Battery SR-44 1.5V
938882

RRP: € 10.00 *



U-WAVE fit, buzzer model
Transmitter for vernier calipers
264-621
 RRP: € 183.00 *



Hold unit for Digimatic calipers
959143
 RRP: € 35.00 *



Digimatic line
Data button, 1m
959149
 RRP: € 47.00 *



Digimatic line
Data button, 2m
959150
 RRP: € 55.00 *



Connection unit, U-WAVE fit
default model
02AZF300
 RRP: € 102.00 *



USB Input Tool Direct (Digimatic USB)
Digi/Digi2 straight data button
06AFM380C
 RRP: € 121.00 *

Standard accessories:



Depth measuring bridge for vernier calipers, 75 mm wide
75 mm width for 100, 150, 200 mm measuring range
050083-10
 RRP: € 58.00 *



Depth measuring bridge for vernier calipers
100 mm width for 100, 150, 200 mm measuring range
050084-10
 RRP: € 65.00 *

spare Parts

Consumables:



Battery SR-44 1.5V
938882