



CE
EMC
EN: 61326

3.2" Color TFT LCD, supporting photo/video, time/date display and multi-languages. Video and images can also be transferred to your PC via the SD Card or USB cable(included). Waterproof(IP67) flexible gooseneck retains configured shape.

Specifications

| | BS-150 | BS-150B | BS-151 |
|--------------------------------|---------------------------------------|--------------|--------------|
| LCD screen type | 3.2"TFT | 3.2"TFT | 3.5"TFT |
| LCD Pixels | 320x240 | | |
| The max number of frames(FPS) | 30FPS/S | | |
| Picture format from the camera | JPG(640x480) | | |
| Camera video format | 3GP | AVI(720x240) | MP4(640x480) |
| Gooseneck length | 1m(39") | | |
| Camera diameter | 17mm(0.66") | | |
| Viewing distance | 5cm to 15cm | | |
| Viewing angle | 68° | | |
| Zoom | | | 2.0X |
| Rotation | | Mirror 180° | 90° |
| SD card | Max 8GB | 2GB/Max 8GB | |
| Working voltage | Li Battery 3.7V/1800mA | | |
| TV-OUT | PAL/ NTSC | NTSC | PAL/ NTSC |
| Language | Support English,French,German,Spanish | | |

Model BS-151

Size(HxWxD): 240mm x 160mm x 100mm
Weight: 584g
Accessories:
3.7V Li battery, power adaptor, USB cable, mirror, hook, magnet, gift box with carrying case.



CE
EMC
EN: 61326

Model BS-150



CE
EMC
EN: 61326

Model BS-128

2.4" Color TFT LCD, supporting real-time live view. Waterproof(IP67) flexible gooseneck retains configured shape.

Features

- Support real-time live view
- Highlighted with LED to support the operation in the dark
- 4 x AA battery
- Standby function to support the charge
- Support rotating the image 180°from top to bottom
- Flexible gooseneck imager head with waterproof
- 2.4" Color TFT LCD

Specifications

| | |
|-------------------------------|-------------|
| LCD screen type | 2.4"TFT |
| LCD Pixels | 480x234 |
| The max number of frames(FPS) | 30FPS/S |
| Gooseneck length | 1m(39") |
| Camera diameter | 17mm(0.66") |
| Viewing distance | 5cm to 15cm |
| Viewing angle | 68° |
| Working voltage | 4 x AA |

Size(HxWxD): 240mm x 160mm x 100mm
Weight: 584g


Accessories:
4 x AA battery, mirror, hook, magnet, gift box with carrying case.

Features

- Support real-time live view
- TV peripherals to support operations in other devices
- Highlighted with LED to support the operation in the dark
- Built-in 1800mAh lithium battery, support USB charging
- Standby function to support the charge
- Support rotating the image 180°from top to bottom
- Flexible gooseneck imager head with waterproof
- 3.5" Color TFT LCD
- Camera and Video function

Specifications

| | |
|-------------------------------|------------------------|
| LCD screen type | 3.5"TFT |
| LCD Pixels | 320x240 |
| The max number of frames(FPS) | 30FPS/S |
| Gooseneck length | 1m(39") |
| Camera diameter | 17mm(0.66") |
| Viewing distance | 5cm to 15cm |
| Viewing angle | 68° |
| Zoom | 2.0X |
| Working voltage | Li Battery 3.7V/1800mA |
| TV-OUT | PAL/NTSC system |

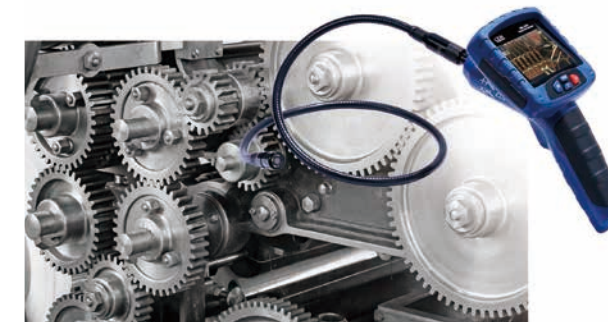

CE
EMC
EN: 61326

Model BS-101

Size(HxWxD): 240mm x 160mm x 100mm
Weight: 584g
Accessories:
3.7V Li battery, power adaptor, mirror, hook, magnet, gift box with carrying case.