



Model BS-151

CE
EMC
EN: 61326

3.2" Color TFT LCD, supporting photo/video, time/date display and multi-languages. Video and images can also be transferred to your PC via the SD Card or USB cable(included). Waterproof(IP67) flexible gooseneck retains configured shape.

Specifications	BS-150	BS-150B	BS-151
LCD screen type	3.2"TFT	3.2"TFT	3.5"TFT
LCD Pixels	320x240		
The max number of frames(FPS)	30FPS/S		
Picture format from the camera	JPG(640x480)		
Camera video format	3GP	AVI(720x240)	MP4(640x480)
Gooseneck length	1m(39")		
Camera diameter	17mm(0.66")		
Viewing distance	5cm to 15cm		
Viewing angle	68°		
Zoom			2.0X
Rotation		Mirror 180°	90°
SD card	Max 8GB	2GB/Max 8GB	
Working voltage	Li Battery 3.7V/1800mA		
TV-OUT	PAL/ NTSC	NTSC	PAL/ NTSC
Language	Support English,French,German,Spanish		

Size(HxWxD): 240mm x 160mm x 100mm
Weight: 584g
Accessories:
 3.7V Li battery, power adaptor, USB cable, mirror, hook, magnet, gift box with carrying case.



Model BS-150

CE
EMC
EN: 61326



Model BS-128

CE
EMC
EN: 61326

2.4" Color TFT LCD, supporting real-time live view. Waterproof(IP67) flexible gooseneck retains configured shape.


Features
Support real-time live view
Highlighted with LED to support the operation in the dark
4 x AA battery
Standby function to support the charge
Support rotating the image 180°from top to bottom
Flexible gooseneck imager head with waterproof
2.4" Color TFT LCD

Specifications	
LCD screen type	2.4"TFT
LCD Pixels	480x234
The max number of frames(FPS)	30FPS/S
Gooseneck length	1m(39")
Camera diameter	17mm(0.66")
Viewing distance	5cm to 15cm
Viewing angle	68°
Working voltage	4 x AA

Size(HxWxD): 240mm x 160mm x 100mm
Weight: 584g
Accessories:
 4 x AA battery, mirror, hook, magnet, gift box with carrying case.

Features
Support real-time live view
TV peripherals to support operations in other devices
Highlighted with LED to support the operation in the dark
Built-in 1800mAh lithium battery, support USB charging
Standby function to support the charge
Support rotating the image 180°from top to bottom
Flexible gooseneck imager head with waterproof
3.5" Color TFT LCD
Camera and Video function

Specifications	
LCD screen type	3.5"TFT
LCD Pixels	320x240
The max number of frames(FPS)	30FPS/S
Gooseneck length	1m(39")
Camera diameter	17mm(0.66")
Viewing distance	5cm to 15cm
Viewing angle	68°
Zoom	2.0X
Working voltage	Li Battery 3.7V/1800mA
TV-OUT	PAL/NTSC system

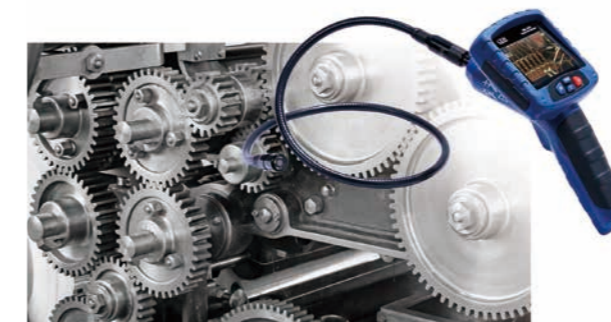

Model BS-101

CE
EMC
EN: 61326

Size(HxWxD): 240mm x 160mm x 100mm
Weight: 584g
Accessories:
 3.7V Li battery, power adaptor, mirror, hook, magnet, gift box with carrying case.